

#### Application

The 2112W/Wi is a full-range, two-way system designed for a wide variety of speech and music applications, such as clubs, churches, or concert settings.

#### Description

The 2112W/Wi is the classic wedge shape used most commonly for permanent or portable floor monitor applications.

#### Cabinetry

The cabinet design uses a 9 ply 3/4" Birch plywood with dado joints, recessed baffle and a 16 gauge front perforated grill for long lasting durability. The 2000 Series is equipped with two parallel 1/4" jacks and one Neutrik Speakon jack.

#### Covering Options

The cabinet is covered by high grade Ozite using waterproof adhesive. It is also available in black or white Duracoat and natural birch finish. \*\*

#### Transducers

The two-way cabinet is loaded with a 12" low frequency driver and a 1" Titanium compression driver(Wi)\*\* or a 1" screw on Motorola Powerline(W). The high frequency driver is coupled with a durable ABS horn for proper dispersion. The cabinet is tuned by means of a vented port set at the optimum frequency.


\*\*Refer to price sheet for upgrade pricing.

#### Specifications

<b>Frequency Response:</b>	60hz-18Khz
<b>Power Handling:</b>	350w (cont.)
<b>Sensitivity (1 watt/meter):</b>	98dB
<b>Nominal Dispersion:</b>	70v x110h
<b>Impedance:</b>	8 Ohms
<b>Transducer Components</b>	
Low Frequency:	12" woofer
High Frequency:	1" Powerline (W) or 1" titanium (Wi)
<b>Audio Input Connections:</b>	2 - 1/4" & 1 - Speakon jack
<b>Enclosure:</b>	Vented
<b>Crossover:</b>	2nd Order
<b>High Frequency Protection:</b>	Yes
<b>Steel Pole Mount:</b>	No
<b>Physical</b>	
Dimensions (H x W x D):	21.8" x 15.5" x 15" (55.4cm x 39.4cm x 38.1cm)
W Weight:	36 lbs./16.4 Kg
Wi Weight:	41 lbs./18.7 Kg

#### Warranty Information

The 2000 Series high definition speakers feature a 10 year warranty. Please refer to the warranty information card shipped with all Sound Bridge speaker products.

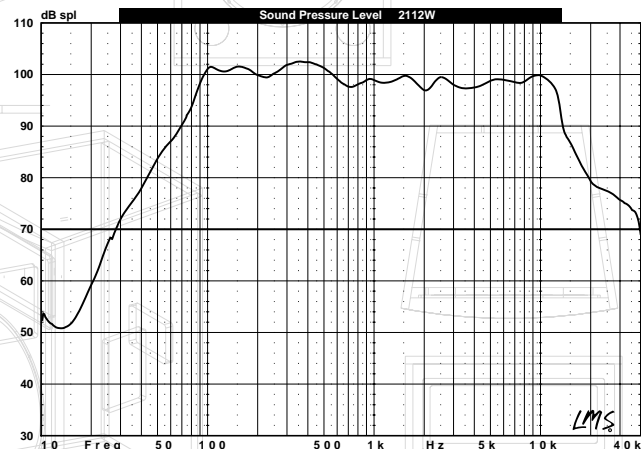

**SOUND•BRIDGE**  
**SB**  
*Acoustic Labs*