

Application

The 3118BPS is an extended low-range system designed for a wide variety of speech and music applications, such as clubs, churches, or concert settings.

Description

The 3118BPS is rectangular in shape with a vented front, facilitating under-stage or hidden applications. It is designed to be utilized as a low frequency enhancement to the 3000 series full-range speakers.

Cabinetry

The cabinet design uses a 13 ply 3/4 high quality baltic birch plywood with dado joints, recessed baffle and a 16 gauge front perforated grill for long lasting durability. The baffle is cut from 1" MDF to enhance acoustical properties and to give the components a rigid interface. Two Neutrik Speakon connectors and Neutrik parallel 1/4" jacks are installed on all speakers in the 3000 series.

Covering Options


The cabinet comes coated in black Duracoat. It is also available in white Duracoat and a natural birch finish. Please refer to price sheet for upgrade pricing.

Transducers

The cabinet is loaded with a 18" cast aluminum low frequency driver in adual-chamber vented enclosure. The cabinet is tuned by means of a vented port set at the optimum frequency.

Specifications

Frequency Response:	40hz-400hz
Power Handling:	450w (cont.)
Sensitivity (1 watt/meter):	99dB
Nominal Dispersion:	N/A
Impedance:	8 Ohms
Transducer Components	
— Low Frequency:	18" woofer
— High Frequency:	None
Audio Input Connections: Two Neutrik Speakon connectors and two Neutrik parallel jacks.	
Enclosure:	Vented
Crossover:	None
High Frequency Protection:	N/A
Steel Pole Mount:	None
Physical	
Dimensions (H x W x D):	26.8" x 23" x 21.5" (68.1cm x 58.4cm x 54.6cm)
Weight:	81 lbs./36.9 Kg

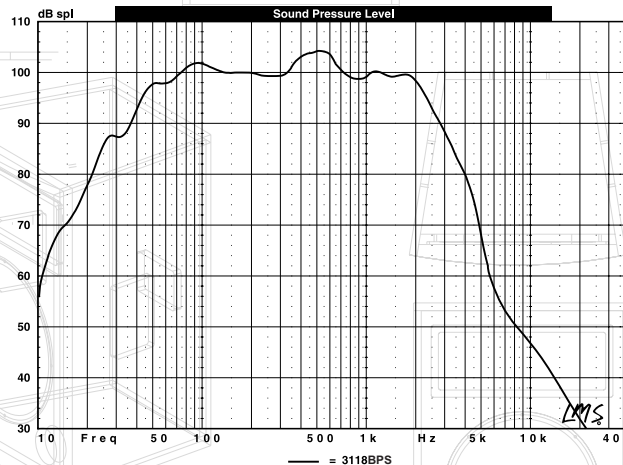

Warranty Information

The 3000 Series high definition speakers feature a 10 year warranty. Please refer to the warranty information card shipped with all Sound Bridge speaker products.

